



TRI-SAC™ OIL MIST BAG FILTERS

*High Efficiency
Fiberglass Bag Filters*



TRI-SAC OIL MIST BAG FILTERS

TRI-DIM Filter's TRI-SAC OIL MIST Fiberglass Bag Filters are extended surface filters that are engineered to work in Oil Mist Removal applications. The TRI-SAC OIL MIST filters are manufactured with a non-woven lining and with polypropylene strips sewn on the peripheral edges of each pocket for added strength and durability. The pockets include loops for proper installation in Oil Mist removal equipment. All this with MERV 15 performance ... TRI-SAC is your choice for Oil Mist Removal.



FEATURES

- Standard Efficiencies
90-95% MERV 15
- Trusted Sealed Span
Stitch Pocket
Construction
- Non-Woven Lining for
Superior Performance
- Trusted Performance
- 16 Standard Sizes -
Special Sizes Available
- Media Backing Provides
Durability
- Peripheral Edge of Each
Pocket Sealed with
Polypropylene Fabric
Strip
- Multiple Header Options
- Gasketing Available
- Engineered for
Demanding Applications

EFFICIENCY

ASHRAE 52.2

MERV 15

TEMPERATURE LIMIT

Maximum 175-200° F (79-93° C)

FINAL RESISTANCE

1.50" W.G. (373 PA)

MEETS ANSI/UL-900 REQUIREMENTS


SQUARE FEET OF MEDIA

18x18x13 5-Pocket 457x457x330	16 sq. ft. 1.5 m ²
18.5x18.5x18 5-Pocket 470x470x457	23 sq. ft. 2.1 m ²
18.375x18.375x15 5-Pocket 467x467x381	19 sq. ft. 1.8 m ²
22x22x18 10-Pocket 559x559x457	55 sq. ft. 5.1 m ²
24.75x22.625x19.5 10-Pocket 629x575x495	61 sq. ft. 5.7 m ²
23.375x23.375x30 10-Pocket 594x594x762	97 sq. ft. 9.0 m ²
23.375x23.375x36 10-Pocket 594x594x914	117 sq. ft. 10.9 m ²
23.375x23.375x36 6-Pocket 594x594x914	70 sq. ft. 6.5 m ²


Please note that other sizes, depths and pocket combinations are available. Filter depth is measured from the front of the header to the end of the pocket, excluding hoops. Depth dimensions have a ± 1/2" tolerance.

INITIAL RESISTANCE

24x24x36 10-Pocket

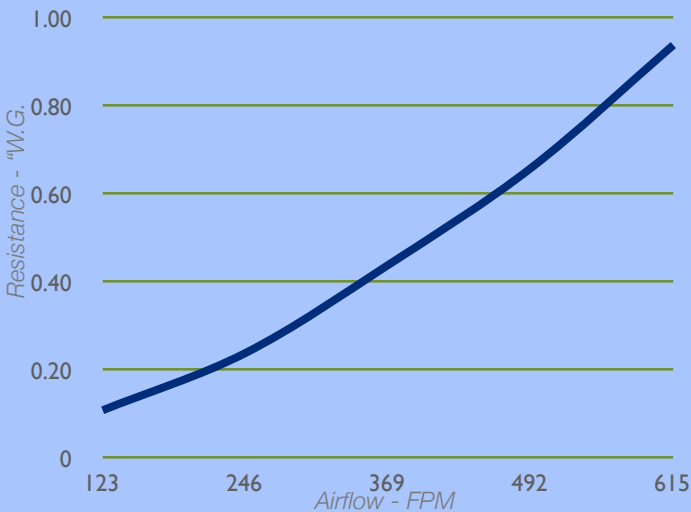

INITIAL PARTICLE SIZE EFFICIENCY

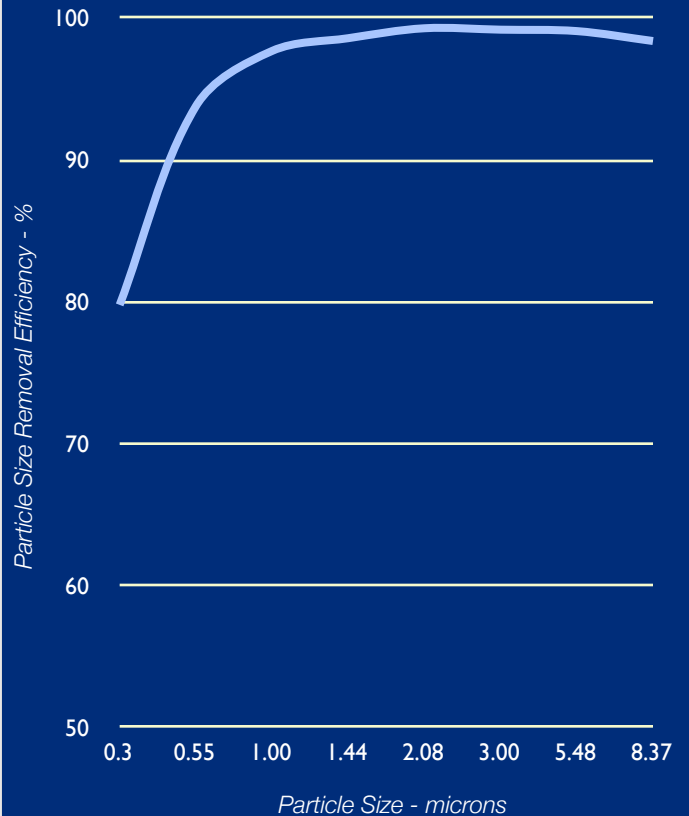

Tri-Dim Filter Corporation is committed to continual product development – all descriptions, specifications and performance data are subject to change without notice.

Tri-Dim products are manufactured to exacting criteria - there can be a ±5% variance in filter performance. Tri-Dim® and Tri-Dek® are Registered Trademarks of Tri-Dim Filter Corporation.



TRI-DIM FILTER CORPORATION
P.O. BOX 466 • 93 INDUSTRIAL DRIVE
LOUISA, VA 23093
(540) 967-2600 • FAX: (540) 967-2835
EMAIL: info@tridim.com • Website: www.tridim.com
TOLL FREE 1-800-458-9835



Local Representation:

Brochure # 1000-2
Revision: 10/2012



PLEASE RECYCLE - This paper may not be recyclable in your area if facilities do not exist. This brochure is printed on paper that is certified by the Sustainable Forestry Initiative (SFI) - for more information go to www.sfi-program.org.

